


NOTE:
 AT JOINTS WHERE STEEL REBARS
 ARE ENCOUNTERED, THE STEEL SHALL
 BE STRAIGHTENED PRIOR TO PATCHING.
 KEYWAYS SHALL BE CLEANED AND
 AND THE SUBGRADE AND SIDES OF
 EXISTING PAVEMENT SHALL BE
 DAMPENED, PRIOR TO PATCHING.

MINIMUM SIZE PATCHES
 FOR STREET REPAIR

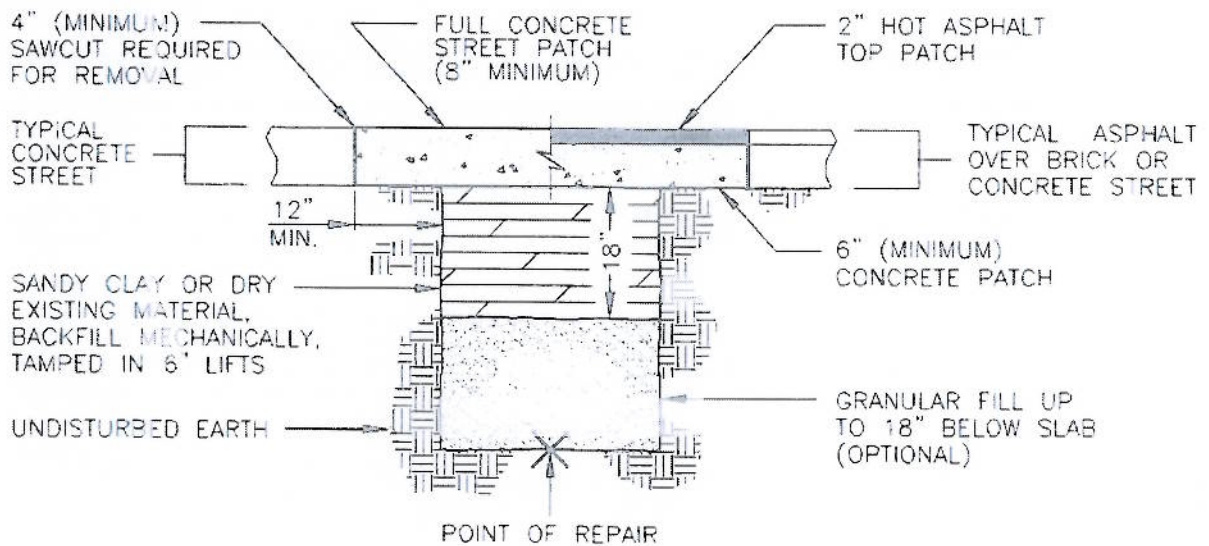

TYPICAL TRENCH AND
 STREET REPAIR